



DAPREST 200

Round enamelled conductor of copper, corona resistant , class 200

Product name:

Daprest 200 - Gr 2
Daprest 200 - Gr 3

Specifications:

IEC 60317-13 and internal LWW

UL approval:

Not approved

Class: 200

Temperature index: $\geq 200^{\circ}\text{C}$
Heat shock: 220°C

Conductor material:

EN 1977 - ETP1 CW003 A
EN 1977 - ETP CW004A
ASTM B49 - ETP C11000/C11040

Insulation:

Basecoat: THEIC-modified polyester or polyesterimide
Overcoat: PD-resistant polyamide-imide

Properties:

- Excellent corona effect resistance
- Very good heat resistance
- High cut-through temperature

Field of application:

- Transformers
- Traction motors
- Power bridges
- Electric motors
- Inverter fed motors

Dimension range:


Daprest 200 Gr 2 $0,630 \leq \varnothing \leq 2,000$ mm
Daprest 200 Gr 3 $0,630 \leq \varnothing \leq 2,000$ mm

Standard packaging:

$0,630 \leq \varnothing \leq 2,000$ mm A250/400, A315/500,
A400/630

Shelf life:

1 year, under normal ambient conditions

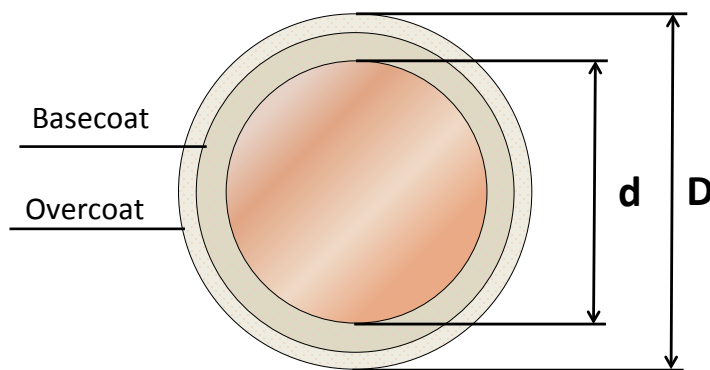

D - d = Increase

DAPREST 200

Round enamelled conductor of copper, corona resistant, class 200

Properties for DAPREST 200

Main characteristics	Test method	Property values	Test values for a DAPREST 200 sample (1,32 mm, Gr2)
<u>Thermal properties</u>			
Heat shock	IEC 60851 - 6.3	≥ 220°C	≥ 220°C
Cut-through	IEC 60851- 6.4	≥ 340°C	≥ 340°C
Temperature index	IEC 60172	≥ 200°C ¹⁾	≥ 200°C ¹⁾
<u>Electrical properties</u>			
Conductor resistance	IEC 60851 - 5.3	0,01724 Ωmm ² /m	0,01724 Ωmm ² /m
Conductivity	1/R	> 58 m/(Ωmm ²)	> 58 m/(Ωmm ²)
Breakdown voltage	IEC 60851 - 5.4	IEC 60317-0-1 ²⁾	8,2 kV
<u>Mechanical properties</u>			
Elongation	IEC 60851-3.3	IEC 60317-0-1 ²⁾	40%
Springiness	IEC 60851-3.4	Springiness ³⁾	IEC 60317-0-1 ²⁾
		Springback ⁴⁾	≤ 5°
Flexibility ⁸⁾	IEC 60851-3.5	Mandrel wind. ²⁾	3 x Ø
Adherence	IEC 60851-3.5	Jerktest ⁵⁾	No loss of adhesion
		Peeltest ⁶⁾	min. 110 ⁷⁾

1. According to supplier certificate

2. Values depend on dimension

3. Up to an including 1,60 mm

4. Over 1,60 mm

5. Up to and including 1,00 mm

6. Over 1,00 mm

7. Revolutions x nominal dimension

8. Internal LWW standard

Values above are for information only. All values noted are typical and can vary between lots and dimensions.

The technical data included is up to date at the time of printing.

LWW reserves the right to make any amendments deemed necessary

Liljedahl Winding Wire

dahréntråd

isodraht

śląska

利里达尔线材
liljedahl wire